



BELTING IS OUR ONLY BUSINESS

COMPREHENSIVE CONVEYOR BELTING RANGE



ABOUT US

The Continental Belting Group, started in 1964 with an initial Capital of Rs.2,500 (USD50) today, we are a global player in The Next Generation, Conveyor Belting Solutions, with revenues nearing Rs.125 Crore (USD20 million)

Continental, designs, produces, and delivers Conveyor Belts to over 95% of the ET500 Conveyor Belt using companies. We also provides a complete range of products and services by leveraging our business expertise and strategic alliance, with leading industry majors, like Hilton, Mitsushima, Rhino, Goodyear etc.

Continental has the largest range in the industry, with belt widths upto 3200mm, Conventional Fabric Reinforced Belts, Steel Cord Belts, Pipe Belts, Sidewall belts, Heat Resistant Belts suited upto 250 Deg C, and many more products in our enormous basket of products.

Continental has the largest inventory of Ready Stock Conveyor Belts, waiting to be despatched. We are ready to take care of any emergency, at any time.

Continental Belting, has a Global Footprints in 14 countries, and practically all the continents.

Continental takes pride in building strategic long-term client relationships. 85.55% of our revenues come from existing customers. They grow and we grow with them



The Founders & Management :

Deepak Chandra - CEO, holds a Bachelor of Technology degree from the Indian



Institute of Technology, Kharagpur and has wide and varied experience in the manufacturing and marketing of conveyor belts. Prior to his current assignment, he has been part of the top management team of companies like Nirlon Ltd, and Dunlop.

Deepak, continues to represent India on the ISO Panels, relating to Conveyor Belting. He is now a Mentor of the ever growing team of professionals.

Rohit Arora – General Manager, holds a Masters Degree in Business Management, and is



spearheading the operations of the Organisation, since 1997. Prior to his current assignment, he has been associated in the top marketing teams of companies like BlowPlast & Allanasons Ltd.

Rohit has also studied about Long Haul conveyors, and has been associated with University of Hannover. He has a strong Techno-Commercial background, and has the responsibility of providing direction and guidance to the various departmental teams.



The Team : They are our most prized asset and represent the core of what makes Continental, so unique. Our professional staff has a broad range of backgrounds, formal education and streetwise experience that helps us bring a distinctive approach to the tasks of establishing an appropriate positioning strategy for Continental Belting.

We strongly believe in fostering, entrepreneurship, and every departmental head and every employee is an interpreneur in themselves. All team members regularly sharpen their skills, thanks to various ongoing training programmes, which have helped bring about synergy in the team activities.

Technology & Infrastructure : We at Continental, are passionate about technology, not just because,



it improves our profitability, or helps us do things more efficiently, but because, we like to do things differently. We pay serious attention to sharing of knowledge and resources, and every employee has complete information, at their disposal, thanks to our top of the line ERP Systems . Our Workshops can boast of the best equipment available worldwide.

WHAT DO WE THINK ABOUT OUR CUSTOMERS :



As partners, whose interests are always safeguarded, may it be, Quality, Deliveries, or After Sales Service. No wonder, that at-least 8 of the top 10 players in any industry, who are conveyor belt users, clients of Continental Belting.

- 90% of standard belts are generally despatched , on the next working day.
- We confidently confirm, that our prices are the most reasonable in the industry, for the given quality, thus a good value product.
- Any un-used products, not to the customer's satisfaction, are immediately replaced. No questions asked.
- Customer grievances are attended to immediately, telephonically, and if required, our service staff, would be at site within 24-48 hours of receiving the call.

WHAT DO OUR CUSTOMERS THINK ABOUT US :



The stability and continuity of **Continental Belting**, Since 1964, gives our customers, the confidence, that, their interests are being taken care of, and their plants would never suffer a shut-down for want of a quality conveyor belt. Our customers are always confident of our ability to provide innovative solutions, to their shoe pinching problems. A Problem Solver.

WHAT DO OUR COMPETITORS THINK ABOUT US :



As Market Leaders, our Competition looks upon us, for new, innovative and improved ways of doing things.

We have earned our respect for fair play.

Continental offers a comprehensive range of Rubber Conveyor Belts :

- *Heavy Duty Fabric Conveyor Belts:*
 - *General Conveyor Belt*
 - *Heat Resistant Conveyor Belt*
 - *Oil Resistant Conveyor Belt*
 - *Flame Resistant Belt*
 - *Cold Resistant Belt*
 - *Chemical Resistant Conveyor Belt.*

- *Steel Cord Conveyor Belt*

- *Chevron Conveyor Belt*

- *PVC/PVG Solid Woven Belt*

- *Special Belts:*
 - *Sidewall Conveyor Belt*
 - *Elevator Conveyor Belt*
 - *Endless Belt*

- *Packing Handling Conveyor Belts:*
 - *Rough Top Conveyor Belt*
 - *Flat Transmission Belt*

- *Rubber Sheets for Pulley Lagging & Skirt Board*



Range of Tensile / Strength Members

A wide range of protective rubber covers, are manufactured in **widths up to 2500 mm** in a most modern automated plant, using the finest raw material inputs. Widths **up to 3200mm** can also be manufactured, on request.

A. Nylon/Nylon (NN) Carcass :

Lower longitudinal elongation

- Higher tensile strength
- Good flexibility and troughability
- Resistance to mildew, moisture and rotting
- Excellent impact resistance



B. Polyester/Nylon (EP) Carcass

- Besides having the advantages as listed for NN carcass belts, EP belts have the additional advantage of lower longitudinal elongation.

C. Cotton/ Cotton (CC) Carcass Suitable for most applications

- Good bonding for rubber
- Good fastener holding properties



D. Steel Cord (ST) Carcass

- Good troughability
- Has tensile strength, well above the other available tensile members
- Very Low elongation

D. Kevlar (K) Carcass Good troughability & Low Elongation

Tensile Strengths, equivalent to Steel Cord, yet, very light in weight.

703 HARDHAVARDHAN, RAHEJA TOWNSHIP, MALAD EAST, MUMBAI 400 097,
INDIA

Tel : +91 22 2877 0048 / 2877 1480 Fax : +91 22 2877 8346

email :sales@continentalbelting.com

www.continentalbelting.com

COVER GRADE CHARACTERISTICS AND APPLICATION		PHYSICAL PROPERTIES						
 General Purpose Belting Standard <small>BELTING IS OUR ONLY BUSINESS</small>		Before Ageing				After Ageing		Maximum Abrasion Loss mm³
		Tensile Strength	Elongation	Temperature of Ageing	Duration of Ageing	Change In Tensile Strength	Change in Elongation	
		MPa	%	°C	hrs.	%	%	
GRADE M-24								
This Grade is recommended for conveying heavy, sharp, highly abrasive materials like metallic ores, granite, lime stone, coal, Blast furnace slag & clinker etc.	IS 1891 PART-I BS 490 PART-I ISO 4195/1 DIN 22102	24	450	70	72	+10 -20	+10 -25	150
GRADE N-17								
Recommended for conveying less severe and moderately abrasive material like sized coal, ash, chalk, bauxite etc.	IS 1891 PART-I BS 490 PART-I ISO 4195/1 DIN 22102	17	400	70	72	+10 -20	+10 -25	200
GRADE N-17 SYNTHETIC								
Composed of Synthetic Rubber mainly, this grade is suitable for arduous application as M-24 and has similar wear resistance	IS 1891 PART-I	17	400	70	72	+10 -20	+10 -25	150
HEAT RESISTANT BELTING								
GRADE HR(T-1)								
This grade is recommended for conveying hot material and suitable for fines upto 100°C and coarse material upto 125°C.	IS 1891 PART-II	12.5	350	100	72	-25	-40	200
GRADE HR (T-2) / SHR								
This grade is recommended for conveying hot material and suitable for fines upto 125°C and lumps upto 150°C.	IS 1891 PART-II	12.5	350	125	72	-35	-50	250
PYROSHIELD								
Pyroshield 200 Deg C Pyroshield 220 Deg C Pyroshield 250 Deg C Pyroshield 300 Deg C	Proprietary	12.5	300	150	72	-35	-50	250

703 HARDHAVARDHAN, RAHEJA TOWNSHIP, MALAD EAST, MUMBAI 400 097, INDIA

Tel : +91 22 2877 0048 / 2877 1480 Fax : +91 22 2877 8346

email :sales@continentalbelting.com

www.continentalbelting.com

FIRE RESISTANT BELTING								
GRADE FR								
Having fire resistance and antistatic properties, this grade is recommended for use where a fire hazard exists eg. Thermal Plants. Underground Mines.	CSA-M422-M87 IS 1891 PART-V DIN-22103/ISO 340	17	350	70	72	+10 -20	+10 -25	175
OIL RESISTANT BELTING								
GRADE OR								
Composed of Synthetic Rubber Compounds this grade is resistant to mineral, vegetable, animal oils and fats.	IS 1891 PART-III	12	250	70	72	±35	±35	NOT SPECIFIED
HYGIENIC BELTING								
GRADE HYGIENIC								
This cover grade is specially designed with nontoxic Rubber Compounds for use in the food processing, pharmaceutical Industry.	IS 1891 PART-IV	10	350	70	72	+10 -25	+10 -45	NOT SPECIFIED
CONTINENTAL CHEVRON BELTING								
These Beltings are specially designed with a Rough/Pimpled or Ribbed Carrying Surface to prevent slippage and ideally suited to carry packaged material on gradients of more than 20°	"Continental" STANDARD							
CHEMICAL RESISTANT BELTING								
GRADE CMR								
This specially designed grade of Conveyor Belting incorporates a Top Cover of Nitrile Rubber and Bottom Cover of chloroprene to	"Continental" STANDARD	12	350	70	72	+10 -20	+10 -25	150

703 HARDHAVARDHAN, RAHEJA TOWNSHIP, MALAD EAST, MUMBAI 400 097,
INDIA

Tel : +91 22 2877 0048 / 2877 1480 Fax : +91 22 2877 8346

email :sales@continentalbelting.com

www.continentalbelting.com

Belt Designation	Full Belt Tensile Strength	Maximum Recommended Working Tension		Nominal Carcass Thickness	Nominal Carcass Weight	Maximum Belt Width (mm) for adequate load support Bulk Density (T/m3)			Minimum Belt width (mm) For adequate Troughing			
		Vulcanised Splice (kN/m)	Mechanical Fasteners			Upto 1.0	Upto 1.5	Upto 2.5	20 Deg. Idlers	30 Deg. Idlers	45 Deg. Idlers	
GENERAL DUTY	200/2	200	20	20	2	0.02	650	500	-	300	400	500
	250/2	250	25	25	2.5	0.02	650	600	-	300	400	500
	315/2	315	31	31	2.7	0.02	900	650	500	300	400	500
	315/3	315	31	31	3	0.03	1000	800	650	400	500	500
	400/2	400	40	40	2.8	0.03	1000	800	650	400	500	500
	400/3	400	40	40	3.2	0.03	1200	900	650	500	500	500
	500/3	500	50	*	3.4	0.03	1200	900	650	500	500	500
	630/3	630	63	*	3.5	0.03	1200	1000	800	500	500	500
HEAVY DUTY	200/2	200	20	20	2.8	0.03	800	650	500	400	400	500
	250/2	250	25	25	3	0.03	800	650	500	400	400	500
	315/2	315	31	31	3.1	0.03	1000	800	650	400	500	500
	315/3	315	31	31	3.6	0.03	1200	1000	800	500	500	500
	400/2	400	40	40	3.2	0.03	1200	1000	800	500	500	500
	400/3	400	40	40	3.6	0.03	1200	1000	800	500	500	650
	400/4	400	44	40	4.5	0.04	1200	1000	800	500	500	650
	500/3	500	50	*	3.7	0.03	1400	1000	800	500	500	650
	500/4	500	55	*	4.5	0.04	1400	1200	900	500	650	650
	630/3	630	63	*	3.9	0.04	1600	1400	1200	650	800	800
	630/4	630	70	*	5	0.05	1800	1600	1400	650	800	900
	800/4	800	90	*	5.4	0.05	1800	1600	1600	650	900	900
	1000/4	1000	110	*	5.8	0.05	2000	1800	1600	800	900	1000
	1000/5	1000	110	*	6.6	0.07	2000	1800	1600	800	900	1000
Extra Heavy Duty	1000/5	1000	110	»	7	0.08	2000	1800	1600	800	900	1000
	1250/4	1250	140	*	6.8	0.08	2000	1800	1600	800	800	900
	1250/5	1250	140	*	7.5	0.09	2000	1800	1800	800	900	1000
	1400/4	1400	145	*	7.2	0.08	2000	1800	1800	800	900	1000
	1400/5	1400	155	*	8.2	0.09	2000	1800	1800	800	900	1200
	1600/4	1600	180		7.4	0.08	2000	2000	1800	800	900	1200
	1600/5	1600	180		8.8	0.1	2000	2000	1800	800	1000	1200
	1800/6	1800	190	*	10.6	0.11	2000	2000	2000	900	1000	1200

703 HARDHAVARDHAN, RAHEJA TOWNSHIP, MALAD EAST, MUMBAI 400 097, INDIA

Tel : +91 22 2877 0048 / 2877 1480 Fax : +91 22 2877 8346

email :sales@continentalbelting.com

www.continentalbelting.com

Heat Resistant Conveyor Belt

- Suitable for conveying hot material like powder or lumpy materials at high temperatures.
- Ideal for conveying sintered ores, cokes, soda ash, chemical fertilizer, slag and foundry.
- It can resist high temperature.
- The rubber compound used in the cover has been designed to avoid premature aging due to contact with any source of heat.
- Heat resistant Grades can be chosen from page depending on your requirement.

Physical property indexes:

Item		Type		
		1	2	3
Hardness	Difference before and after aging (IRHD)	20		±20
	Maximum value after aging (IRHD)	85		
Tensile Strength	Change rate of property % ≤	25	30	40
	Minimum value after aging / Mpa	12	10	5
Breaking Elongation	Change rate of property % ≤	50		55
	Minimum value after aging %	200		180

High Temperature Resistant Conveyor Belt:

- The belt carcass of this product is generally EP fabric of high modulus, low shrink, and high breaking tensile strength.
- Cover rubber specially compounded synthetic rubber having very good heat resistance.
- The belt is made with extra care after mixing rubber with high temperature resistant materials, assembling and vulcanizing.
- The belt can bear continuous 250°C even short exposures of even 350°C
- It is suitable for use in cement, metallurgical and steel industry.



703 HARDHAVARDHAN, RAHEJA TOWNSHIP, MALAD EAST, MUMBAI 400 097, INDIA


Tel : +91 22 2877 0048 / 2877 1480 Fax : +91 22 2877 8346

email :sales@continentalbelting.com

www.continentalbelting.com

Oil Resistant Conveyor Belt

- Oil resistant belt carries parts and components coated with machine oil, heavy-oil treated coal in cooking plants and electric power generating plants, soybean draff, fish meat and other oily materials. Materials containing non-polar organic solvents and fuel.
- The belt compounded of oil resistant synthetic rubber has good resistance to the damaging effects encountered when conveying oil contaminated or treated materials.

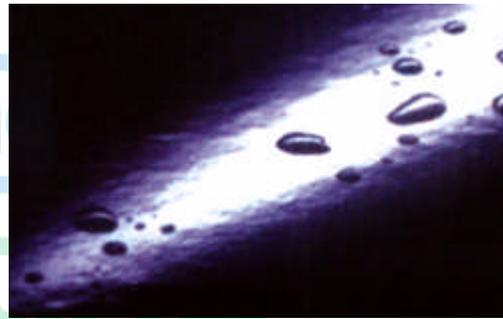

➤ Cover rubber property:

Item	Tensile Strength / MPA	Elongation at break / %	Abrasion / mm ³
LO		≥350	≤200
DO		≥350	≤160

Flame Resistant Belt

The product is made of cotton canvas, nylon canvas or EP canvas and finished through the process of calendaring, assembling, vulcanizing etc, suitable for conveying materials that require a flame resistant and static conductive belts in power, chemical, light, metallurgical and grain processing industries, under the condition of flammable or explosive environment above coal mines.



703 HARDHAVARDHAN, RAHEJA TOWNSHIP, MALAD EAST, MUMBAI 400 097, INDIA

Tel : +91 22 2877 0048 / 2877 1480 Fax : +91 22 2877 8346

email :sales@continentalbelting.com

www.continentalbelting.com

Cover Type	Standards	Minimum Tensile Strength (MPA)	Minimum Elongation (%)	Abrasion	Material Covered
Fire Resistant	SANS-F	17	350	180	Material with fire hazards, e.g. Coal
	IS-1891(FR Grade)	17	350	200	
	ISO-340(FR Grade)	17	350	180	
	AS-F(FR Grade)	14	300	200	
	AS-1332(FR Grade)	14	300	200	
	DIN S Grade	17	350	180	
	DIN K Grade	17	400	200	
	MSHA-FR	17	350	200	
	CAN/CSA (FR Grade)	17	350	200	

Cover rubber property:

Tensile Strength / MPA	Elongation at break / %	Abrasion / mm ³
≥18	≥450	≤200
≥16	≥400	≤250

Cold Resistant Belt



This belt can be supplied in cotton canvas, nylon canvas or EP canvas as carcass, Cover rubber is a blend of NR and BR, which has high elasticity, shock resistance, cold resistance etc, It can work @ -40°C.

Usage: suitable for conveying materials outdoors in freezing area, cold storage, etc.

Cover physical property indexes

Item	Index		
	H	D	L
Tensile Strength / Mpa ≥	24	18	15
Breaking Elongation / % ≥	450	400	350

703 HARDHAVARDHAN, RAHEJA TOWNSHIP, MALAD EAST, MUMBAI 400 097, INDIA

Tel : +91 22 2877 0048 / 2877 1480 Fax : +91 22 2877 8346

email :sales@continentalbelting.com

www.continentalbelting.com

Ageing experiment (70°C, 7d)	Change rate of tensile strength / %	±25	±25	±25
	Change rate of breaking elongation / %	±25	±25	±25
Abrasion / mm ³ ≤		120	100	250
Cold resistant coefficient at elongate ≥	C ₁ (-45°C)	0.3		
	C ₂ (-50°C)	0.2		
<p>Note:</p> <p>C1-- temperature condition is -45°C~+50°C; C2-- temperature condition is -60°C~+50°C</p>				

Chemical Resistant Conveyor Belt



- The rubber cover, which is made from chemical resistant materials, has fine anti-chemical corrosiveness and good physical property.
- It is specially made for those materials which would dissolve expand or corrode the belt.
- It is suitable for conveying material with chemical corrosiveness in chemical factory, chemical fertilizer factory, paper mill, mining industry etc.

Technical indexes

Item			Tensile Strength /Mpa ≥	Elongation at break /% ≥	Abrasion /mm ³ ≤	Hardness /(°)+10-5	Ozone deterioration
Cover	Physical property	Before aging	14	400	250	60	no cracks
		After aging	12	340	-	65	-
	Acid and alkali	Class	Soak liquid	Density	Soak conditions	Change rate before and after soak	

703 HARDHAVARDHAN, RAHEJA TOWNSHIP, MALAD EAST, MUMBAI 400 097, INDIA

Tel : +91 22 2877 0048 / 2877 1480 Fax : +91 22 2877 8346

email :sales@continentalbelting.com

www.continentalbelting.com

	resistance				°C x h	Swelling rate	Change rate of tensile strength
		A1	HCL	18%	50°C x 96h	≤+10%	≤-10%
		A2	H2SO4	50%	50°C x 96h	≤+10%	≤-10%
		A3	NaOH	48%	50°C x 96h	≤+10%	≤-10%

Steel Cord Conveyor Belt >>

- Used in coal, ore, port, metallurgical, power and chemical industries, suitable for long distance and heavy load transportation of materials.
- Standards offered: DIN22131, EN ISO 15236, SANS1366 and AS1333.
- Cover Compounds: General, Fire-resistant, Cold-resistant, Abrasion-resistant, Heat-resistant and Chemical-resistant.

Belt Structures:



ferenced Belt Specifications

703 HARDHAVARDHAN, RAHEJA TOWNSHIP, MALAD EAST, MUMBAI 400 097, INDIA

Tel : +91 22 2877 0048 / 2877 1480 Fax : +91 22 2877 8346

email :sales@continentalbelting.com

www.continentalbelting.com

STEEL CORD BELT SELECTION

Belt Specifications		ST1000	ST1250	ST1600	ST2000	ST2500	ST3150	ST3500	ST4000	ST4500	ST5000	ST5400
Tensile Strength (N/mm)		1000	1250	1600	2000	2500	3150	3500	4000	4500	5000	5400
Max. Diameter of Cord(mm)		4.1	4.9	5.6	5.6	7.2	8.1	8.6	8.9	9.7	10.9	11.3
Pitch(mm) ±1.5		12	14	15	12	15	15	15	15	16	17	17
Min. Rubber Cover Thickness(mm)		4	4	4	4	5	5.5	6	6.5	7	7.5	8
Width (mm)	Tolerance (mm)	Cord Number										
		39	34									
500	±5	39	34									
650	±7	51	44	40	51	40	40	40	40	37		
800	±8	64	55	50	64	50	50	50	50	46	43	43
1000	±10	81	69	64	81	64	64	64	64	59	55	55
1200	±10	97	84	77	97	77	77	77	77	71	66	66
1400	±12	114	98	90	114	90	90	90	90	84	78	78
1600	±12	131	112	104	131	104	104	104	104	96	90	90
1800	±14	147	127	117	147	117	117	117	117	109	102	102
2000	±14	164	141	130	164	130	130	130	130	121	113	113
2200	±15	181	155	144	181	144	144	144	144	134	125	125
2400	±15	197	169	157	197	157	157	157	157	146	137	137
2600	±15	214	184	170	214	170	170	170	170	159	149	149
2800	±15	231	198	184	231	184	184	184	184	171	161	161
3000	±15	247	212	197	247	197	197	197	197	184	172	172
3200	±15	264	227	210	264	210	210	210	210	196	184	184

ST Belt Splice :Splice dimensions as per DIN 22131

	ST1000	ST1250	ST1600	ST2000	ST2500
Minimum step length (mm)	300	350	400	450	500
Splice length (mm)	600	650	750	1150	1350
	ST3150	ST3500	ST4000	ST4500	ST5000
Minimum step length (mm)	650	650	750	800	900
Splice length (mm)	1650	2350	2650	2800	4050

703 HARDHAVARDHAN, RAHEJA TOWNSHIP, MALAD EAST, MUMBAI 400 097, INDIA

Tel : +91 22 2877 0048 / 2877 1480 Fax : +91 22 2877 8346

email :sales@continentalbelting.com

www.continentalbelting.com

Chevron Conveyor Belt >>



Chevron conveyor belt is suitable for conveying loose, bulky or bagged materials on inclined surface at angles of less than 40 degrees.

Features:

- Anti-slip;
- Cleats and top cover rubber are vulcanized integrally;
- Cleat pattern, angle and pitch are designed

elaborately.

Selection of a type and height of cleats depends on the material to be conveyed and the angle of inclination:

Type of material	Conveyed Material	H(mm):
		15
Powdery	Flour, etc.	25°
Loose flowing	Corn, barley, wheat, rye, etc.	20/25°
Loose rolling	Gravel, ground stone, etc.	25°
Packed	Sacks, paper sacks, etc.	30/35°
Sticky	Wet sand, ash, wet loam, etc.	30/35°

Cleat pattern ranges: Conveyor belts with close V type, open V type, & Y type

703 HARDHAVARDHAN, RAHEJA TOWNSHIP, MALAD EAST, MUMBAI 400 097, INDIA

Tel : +91 22 2877 0048 / 2877 1480 Fax : +91 22 2877 8346

email :sales@continentalbelting.com

www.continentalbelting.com

PVC/PVG Solid Woven Belt >>

Applications & features:

- Especially suitable for material conveying at inflammable or underground coal mines.
- The fabric is high in strength, with low elongation, light carcass, shock resistant, anti-tear and good in trough ability.


PVC Solid Woven Conveyor Belt:

- Suitable for applications in dry conditions at a slope angle of no greater than 16 degrees.
- Cover thickness can be from 0.5 to 4 mm.
- Nitrile Covered PVG type:
- Suitable for applications at a slope angle of less than 20 degrees, thickness can be 1 to 8 mm.
- Resistance to wetness, slip, low temperature and wear resistance of the belt.

Standards: MT914, BS3289 and HG2805

Sidewall Conveyor Belt

Sidewall conveyor belt can be used for horizontal, sloping or vertical conveyance, it is one of the most effective ways of elevating materials in a confined space, the economy is achieved by single belt operation, wide range material can be handled, less space and requirement, no transfer point, low maintenance and big capacity.

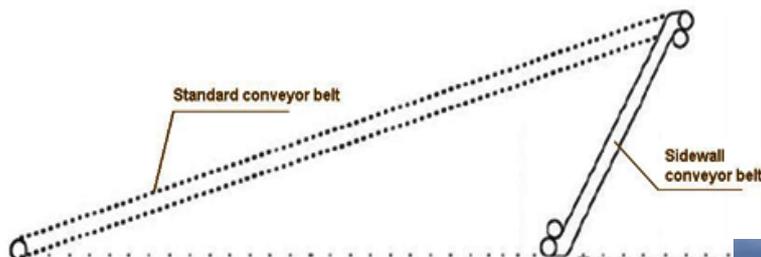

It is based on the following main components:

1. Cross-Stabilized Base Belts
2. Sidewalls
3. Cleats




703 HARDHAVARDHAN, RAHEJA TOWNSHIP, MALAD EAST, MUMBAI 400 097,
INDIA

Tel : +91 22 2877 0048 / 2877 1480 Fax : +91 22 2877 8346

email :sales@continentalbelting.com

www.continentalbelting.com

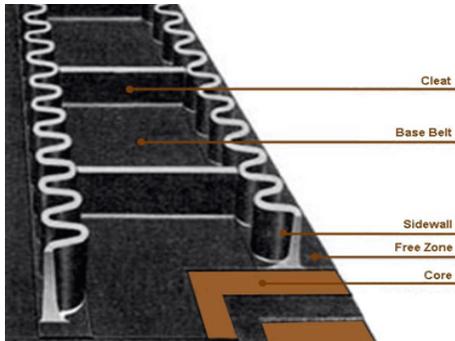

Cleats Type	T'		T								C					S						
Structure																						
Height	35	40	20	35	55	75	90	110	140	180	230	35	55	75	90	110	75	90	110	140	180	230
Belt Width	110	110	40	55	80	80	110	110	160	160	175	55	75	80	110	110	80	110	110	160	160	175
Cleats Type	MBT						XS-T				MBS					XS-S						
Structure																						
Height	110	140	180	230	250	280	360	230	250	280	360	110	140	180	230	250	280	360	230	250	280	360
Belt Width	160	160	160	160	160	160	160	210	220	230	230	160	160	160	160	160	160	160	225	225	225	230
Base Belt Type	XE(Cross Rigid)						XE+2(2ply XE)				XE-MB(Metal Breaker)+2											
Structure																						

Hot Vulcanized Endless Belts

Endless belts are made in our state of the art, hydraulic press, by the process of hot vulcanizing.

Characteristic:

- Bond strength is way ahead of alternative methods of jointing, such as cold vulcanizing, metal fastening, etc.
- Belt can be fitted immediately, thus, the downtime is limited to the belt changeover time
- The surface is smooth, and there is no knocking on the idlers or pulleys.



703 HARDHAVARDHAN, RAHEJA TOWNSHIP, MALAD EAST, MUMBAI 400 097, INDIA

Tel : +91 22 2877 0048 / 2877 1480 Fax : +91 22 2877 8346

email :sales@continentalbelting.com

www.continentalbelting.com

Rough Top Conveyor Belt



Construction: 2 or 3 ply construction with cut edges and carcass of NN or EP fabric.

The surface texture resists the tendency for the material to roll back down the conveyor.

- The top cover is made of wear-resistant rubber with a non-slip surface. It has cushioning effect, mollifies and absorbs vibrations and impacts given on transported materials and simultaneously prevents slipping.
- Available with bottom cover or bare back for slider bed applications.
- Although it depends on the transported materials,

transportation at inclination angles 25 ~ 30 are feasible.

Application: Rough top conveyor belt is used for transporting light weight goods, such as sacks, boxes and parcels, on inclined surface at angles of maximal 35 degree.



Rubber Sheets >>


PULLEY LAGGING SHEETS :

Very helpful in improving drivability / traction, between the belt & pulley, especially helpful in moist climates. These are available in standard Diamond Profile.

Thickness. : 10mm

Maximum Width: 2000mm

Maximum Length: 20m

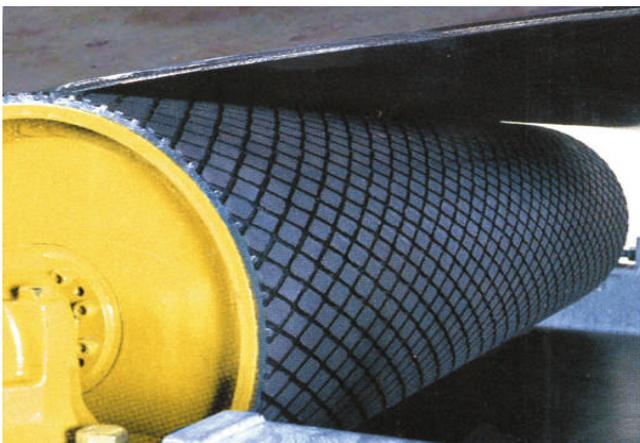

703 HARDHAVARDHAN, RAHEJA TOWNSHIP, MALAD EAST, MUMBAI 400 097,
INDIA

Tel : +91 22 2877 0048 / 2877 1480 Fax : +91 22 2877 8346

email :sales@continentalbelting.com

www.continentalbelting.com

Rubber Skirting

Skirt Board rubber sheets are softer than the conveyor belt, so they do not create scoring or rubbing on the belt. Made for high quality Natural Rubber, having excellent wear resistance.



Thickness. : 4mm to 10mm

Maximum Width: 2000mm

Maximum Length: 20m

BELTING IS OUR ONLY BUSINESS

703 HARDHAVARDHAN, RAHEJA TOWNSHIP, MALAD EAST, MUMBAI 400 097,
INDIA

Tel : +91 22 2877 0048 / 2877 1480 Fax : +91 22 2877 8346

email :sales@continentalbelting.com

www.continentalbelting.com

CONVEYOR BELT QUESTIONNAIRE

- 1) Name : M/s
- 2) Conveyor No. :
- 3) Belt Width (mm) :
- 4) Centre to Centre distance (m) {conveyor length} :
- 5) Nett. Lift! height of Conveyor (m) {Difference between loading and discharge point} :
- 6) Material Conveyed & size (mm) :
- 7) Material Temperature : _____
- 8) Any Chemically Active material! oily materials
Conveyed ? If yes, please identify the material :
- 9) Speed of belt (m/s): _____
- 10) Capacity – Tons/hour (TPH) :
- 11) Troughing angle of the carrying idlers :
- 12) Pulley diameter of the head & tail pulley (mm) :
- 13) Any Other Details / Observations

Note : For multiple conveyors please take photocopies of the questionnaire.

ELEVATOR BELT QUESTIONNAIRE

- 1) Name : M/s.
- 2) Elevator No./Name :
- 3) Belt Width (mm) :
- 4) Centre to Centre distance (m) {elevator height} :
- 5) Bucket Dimension mm {width, height & overhang} :
V. Important : overhang or Projection of buckets from belt face
- 6) Approx. weight of empty bucket (kg) :
- 7) Bucket Pitch (mm)
- 8) Material Conveyed :
- 9) Any Chemically Active material/ oily materials Conveyed ?
If yes, please identify the material :
- 10) Material Temperature :
- 11) Speed of belt (m/s):
- 12) Capacity (TPH) :
- 13) Pulley/Roller Diameters (mm) :

Note : For multiple elevators please take photocopies of the questionnaire.

703 HARDHAVARDHAN, RAHEJA TOWNSHIP, MALAD EAST, MUMBAI 400 097,
INDIA

Tel : +91 22 2877 0048 / 2877 1480 Fax : +91 22 2877 8346

email :sales@continentalbelting.com

www.continentalbelting.com